


## Pull Cylinders

- High strength steel construction.
- Guide ring is designed to help protect against side-load damage.
- High lifecycle polyurethane seal.
- External plunger threads.
- Internal base thread for easy attachment.



3/8"-18 NPTF  
Coupler: CH38-F

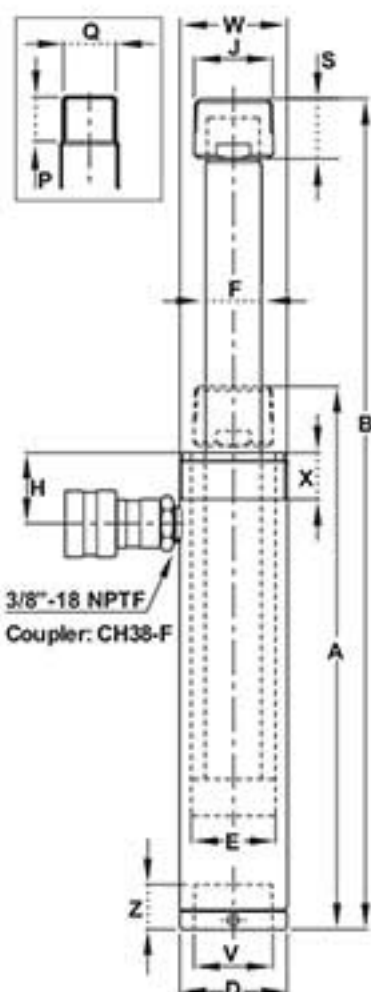

HP1006  
(Clevis CP10: Optional)

High Tonnage Cylinders  
up to 60 Ton  
available on Request!



HP0205



HP0505

Model Number	Stroke (mm)	Capacity (kN)	A	B	Oil Capacity (cc)	Weight (Kg)
			Min. Height (mm)	Max. Height (mm)		
<b>CYLINDER CAPACITY: 2.5 TON = 25 kN</b>						
HP0205	127	25	267	394	45	2.9
<b>CYLINDER CAPACITY: 5 TON = 51 kN</b>						
HP0505	141	51	303	444	103	4.2
<b>CYLINDER CAPACITY: 10 TON = 110 kN</b>						
HP1006	151	110	299	450	237	9.5

Model Number	Cylinder Effective Area (cm <sup>2</sup> )	D	E	H	Adapter		Plunger			Colar		Base Mounting Hole	
		Outside Ø (mm)	Cylinder Bore Ø (mm)	Top to Inlet Port (mm)	Saddle Ø	Thread Length (mm)	Plunger Ø (mm)	Thread Length (mm)	Outside Thread	Thread Ø	Thread Length (mm)	Hole Ø	Thread Length (mm)
		(mm)	(mm)	(mm)									
HP0205	3.6	48	28	42	3/4"-14NPTF	29	19	19	M16x1.5	1 1/2"-16UN	24	3/4"-14NPTF	18
HP0505	7.4	57	42	38	1 1/4"-11.5NPTF	32	30	24	M28x1.5	2 1/4"-14UN	25	1 1/4"-11.5NPTF	24
HP1006	15.7	85	55	38	-	-	32	26	M30x2	M85x2	25	M30x2	25

## Accessories

